




Nvidia Shield Controller Buttons Replacement

This will be a step-by-step guide to take out and replace the controller buttons.

Written By: Daniel Eberhart

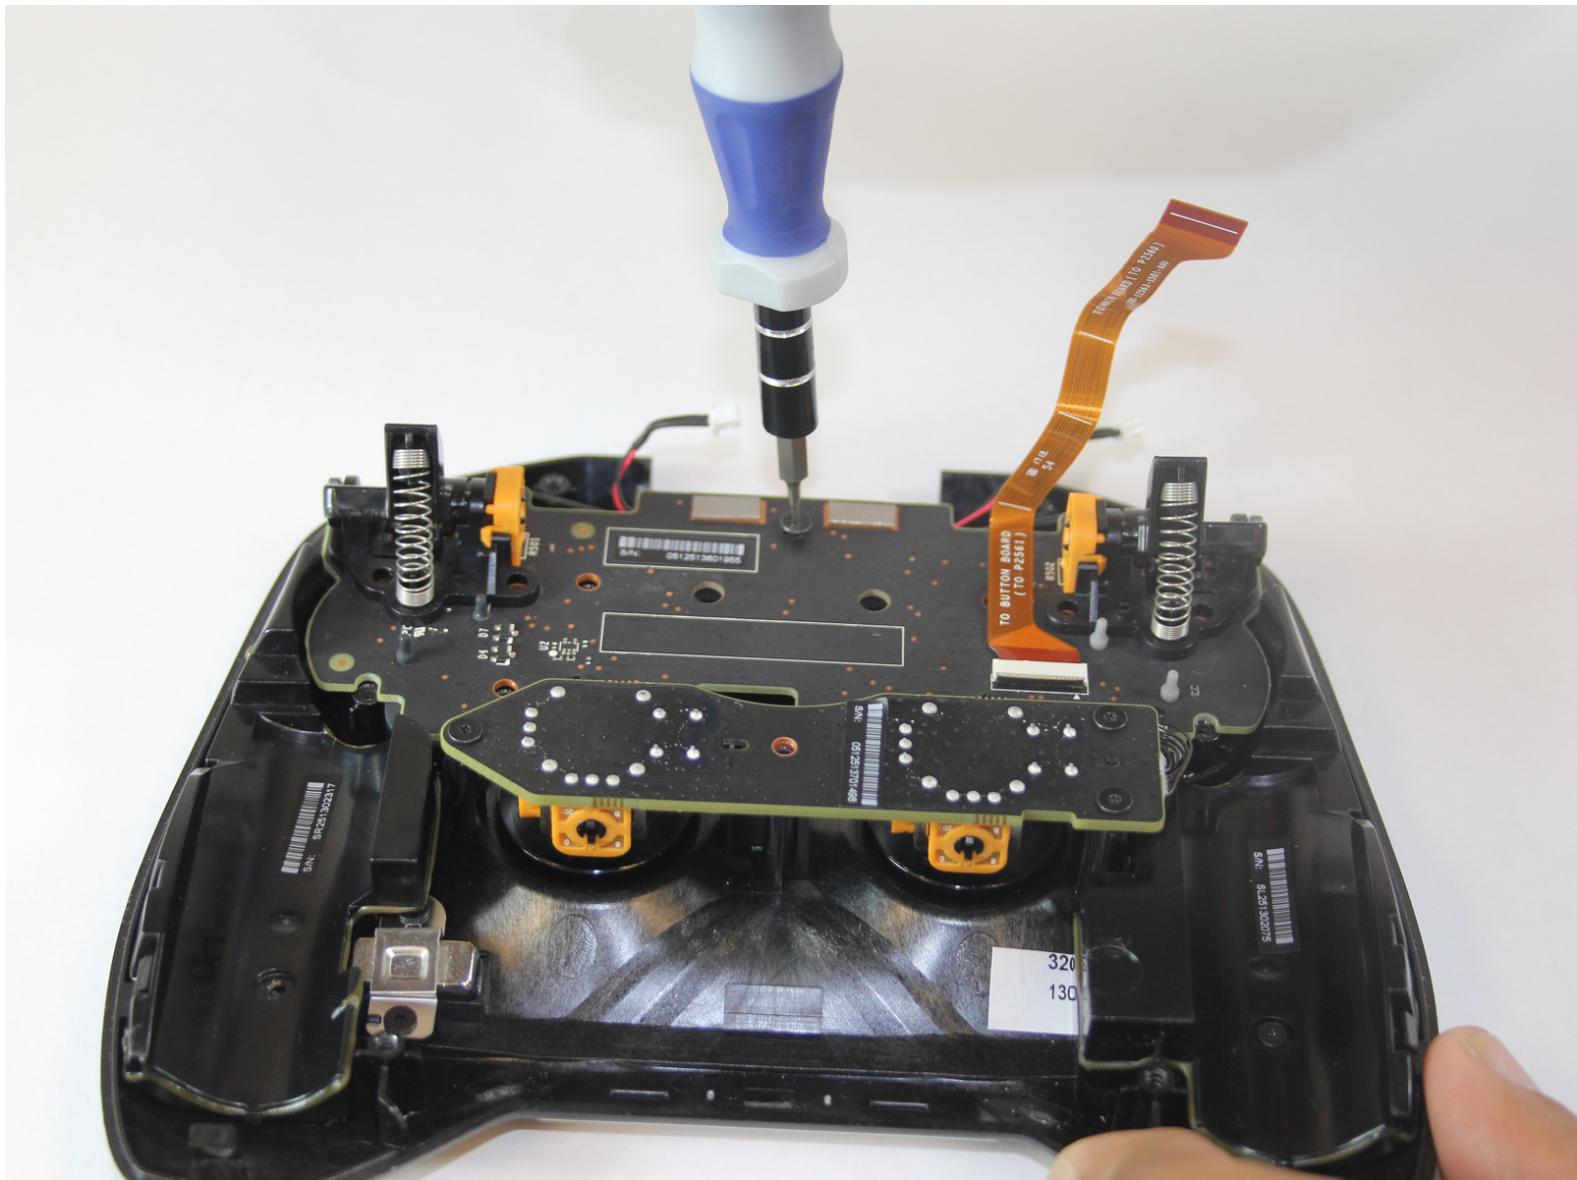




TOOLS:

- [T5 Torx Screwdriver](#) (1)
 - [Spudger](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Remove Front Panel

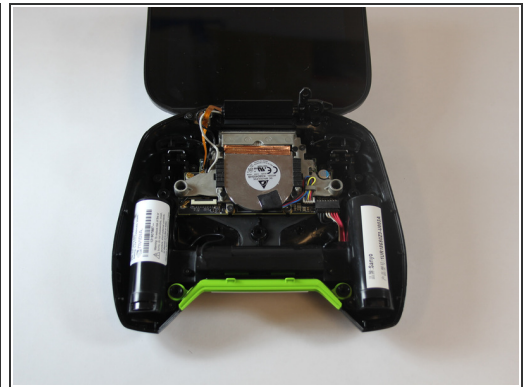


- Unscrew the 7 6.4mm T5 Torx screws from back panel
- Use spudger to separate front and back panels

Step 2 — Remove Green Grill



- The green grill is not screwed in so it can be pulled right out.

Step 3 — Remove Battery Cables

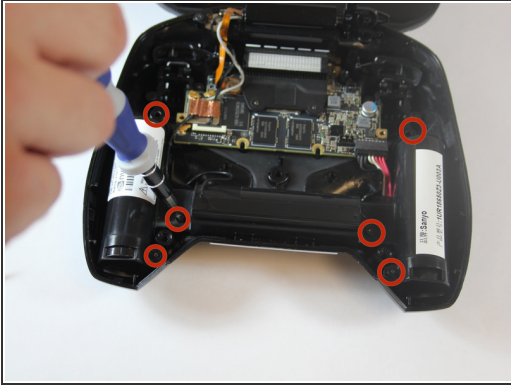


- Remove the 6 6.5mm T5 Torx screws.
- Remove power wires.
- Peel back copper tape and remove black and white wires.

Step 4 — Remove Battery Apparatus



- Once all cables are removed, pull the battery apparatus out.

Step 5 — Removing Button Board

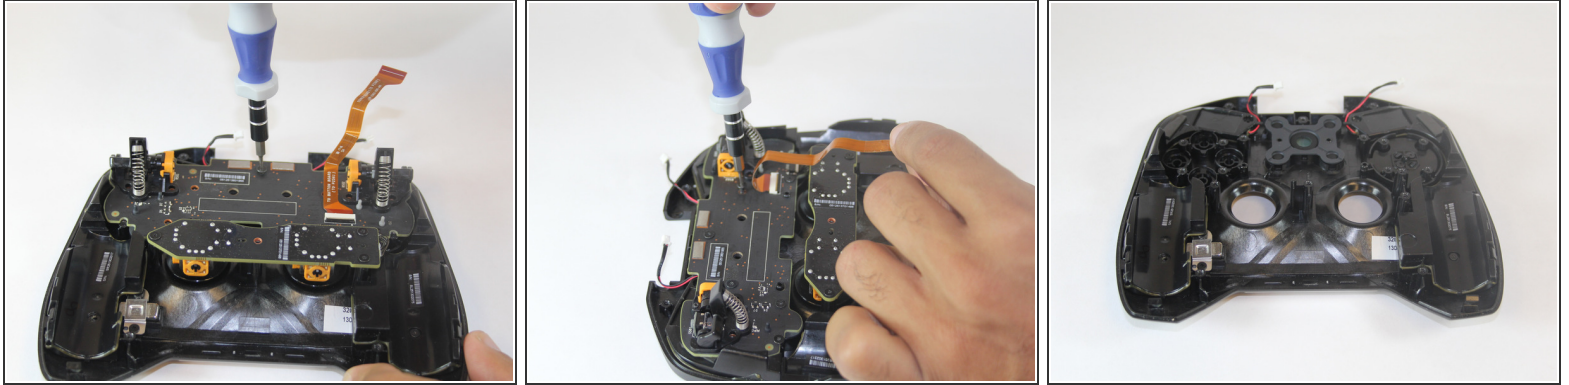

- Once the front panel has been removed, you are able to access the button board, containing seven 6.5mm T5 torx screws.
- The 7th screw is located under orange ribbon
- Once the screws are removed, the button board is able to be lifted out, allowing for access to replace buttons

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-11-24 12:22:59 PM.